

CROSS SECTIONAL DRAWING - INST


REF : NO 1045695_0

DESCRIPTION 0.5 kV,10 P X 1.5mm², Cu (Cl2)/PVC-70°/IS+OS/PVC-BLACK TO BS 5308/2 (GEN)

VOLTAGE (Uo/U) 300/500 V

DATE : 19/04/2016

SPECIFICATION BS 5308/2 (GEN) & Flame Retardant to IEC 60332-1

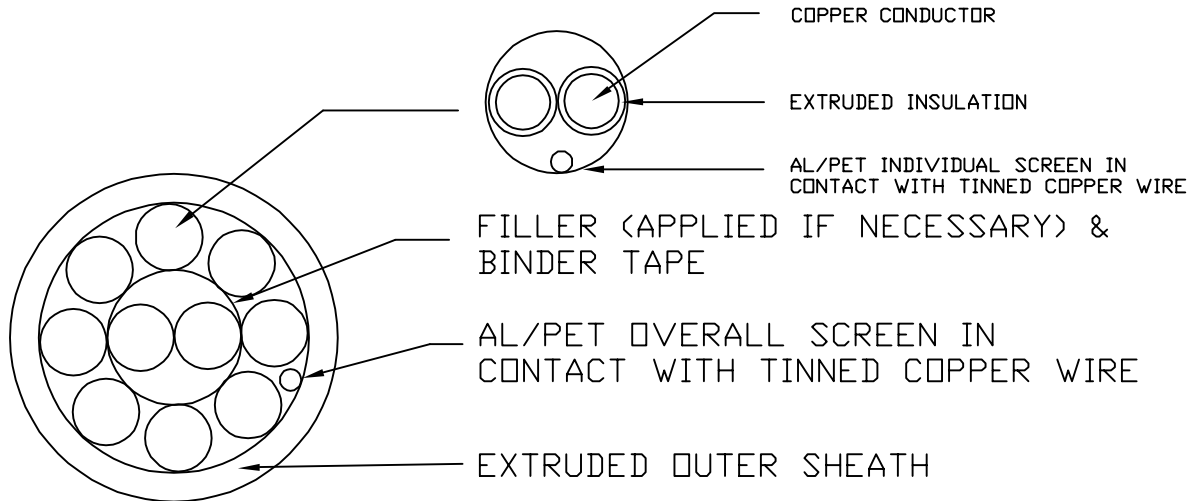

Drawing not to Scale

ITEM	DESCRIPTION	Approx DIA (mm)
1	Circular Stranded Copper Conductor	1.44
2	Extruded PVC70° Insulation	2.74
3	Al / PET Individual Screen Contact with Tinned Copper Drain wire	5.48
4	10 Pair Laid up	20.13
5	Al / PET Overall Screen Contact with Tinned Copper Drain wire	20.33
6	Extruded PVC Outer Sheath (BLACK)	24