


## ET 6



### Approvals

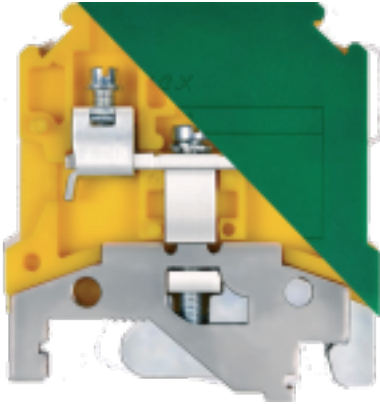

### General Data

Type	ET 6
Wire Termination Technology	Screw Clamp
Ratings	6 sq mm/0.8 Nm
GTIN / Harmonize Custom Code	85389000
Standard Packing Qty (in No)	50
Country of Origin	India
Screw Size	M3.5

### Dimensions & Weight

Height (mm)	45.50
Height (inches)	1.79
Width (mm)	43
Width (inches)	1.69
Thickness (mm)	8
Weight For Standard Packing Qty (Kg)	1.50

## Material Data

Housing	PA 6,6
Standard Colour	Green-Yellow
Other Color Variants	No more colors available

## Rated Conductor Size

Stranded Wire - min (sq mm)	1.5
Stranded Wire - max (sq mm)	6
Solid Wire - min (sq mm)	1.5
Solid Wire - max (sq mm)	10

## Ratings - IEC

Standard	IEC 60947-7-2
Rated Voltage (V)	-
Rated Current (A)	-
Rated Cross Section (sq mm)	6
Short Time Withstand Current (kA)	0.72
Rated Impulse Withstand Voltage(kV)	-
Pollution Degree	III

## Ratings-ATEX

Certificate No	-
Rated Current (A)	-
Rated Cross Section (sq mm)	6

## Ratings-CSA

Rated Voltage (V)	-
Rated Current (A)	-
Wire Cross Section - min (AWG)	20

Wire Cross Section - max (AWG)

8

## Ratings-uL

Rated Voltage (V)

-

Rated Current (A)

-

Conductor Size - min (AWG)

20

Conductor Size - max (AWG)

8

## Accessories

Partition Plate With Foot

Protection Cover

PCK3

Height : 28 mm

Width : 58.35 mm

Thickness : 1 mm




End Clamp

DCKN (Screwless - 35 mm Rail Mounted)

Height : 33 mm

Width : 43.50 mm

Thickness : 6 mm



DCKN10 (Screwless - 35 mm Rail Mounted)

Height : 33 mm

Width : 43.50 mm

Thickness : 10 mm

