


## ET 4



### Approvals

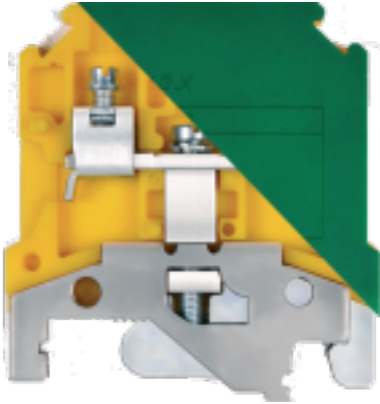

### General Data

|                              |                |
|------------------------------|----------------|
| Type                         | ET 4           |
| Wire Termination Technology  | Screw Clamp    |
| Ratings                      | 4 sq mm/0.5 Nm |
| GTIN / Harmonize Custom Code | 85389000       |
| Standard Packing Qty (in No) | 50             |
| Country of Origin            | India          |
| Screw Size                   | M3             |

### Dimensions & Weight

|                                      |       |
|--------------------------------------|-------|
| Height (mm)                          | 45.50 |
| Height (inches)                      | 1.78  |
| Width (mm)                           | 43    |
| Width (inches)                       | 1.69  |
| Thickness (mm)                       | 6     |
| Weight For Standard Packing Qty (Kg) | 1.20  |

## Material Data

|                      |                          |
|----------------------|--------------------------|
| Housing              | PA 6,6                   |
| Standard Colour      | Green-Yellow             |
| Other Color Variants | No more colors available |

## Rated Conductor Size

|                             |     |
|-----------------------------|-----|
| Stranded Wire - min (sq mm) | 0.5 |
| Stranded Wire - max (sq mm) | 4   |
| Solid Wire - min (sq mm)    | 0.5 |
| Solid Wire - max (sq mm)    | 4   |

## Ratings - IEC

|                                     |               |
|-------------------------------------|---------------|
| Standard                            | IEC 60947-7-2 |
| Rated Voltage (V)                   | -             |
| Rated Current (A)                   | -             |
| Rated Cross Section (sq mm)         | 0.5           |
| Short Time Withstand Current (kA)   | 0.48          |
| Rated Impulse Withstand Voltage(kV) | -             |
| Pollution Degree                    | III           |

## Ratings-ATEX

|                             |   |
|-----------------------------|---|
| Certificate No              | - |
| Rated Current (A)           | - |
| Rated Cross Section (sq mm) | 4 |

## Ratings-CSA

|                                |    |
|--------------------------------|----|
| Rated Voltage (V)              | -  |
| Rated Current (A)              | -  |
| Wire Cross Section - min (AWG) | 24 |

## Accessories

### Partition Plate With Foot

### Protection Cover

#### PCK3

Height : 28 mm

Width : 58.35 mm

Thickness : 1 mm




### End Clamp

#### DCKN (Screwless - 35 mm Rail Mounted)

Height : 33 mm

Width : 43.50 mm

Thickness : 6 mm




#### DCKN10 (Screwless - 35 mm Rail Mounted)

Height : 33 mm

Width : 43.50 mm

Thickness : 10 mm



#### SCKN (35 mm Rail Mounted)

Height : 35.50 mm

Width : 50.60 mm

Thickness : 8 mm




Supplied by Digital Stout Innovation & Trading FZE UAE

**SCUN (Universal Rail Mounted)**

**Height : 35.50 mm**

**Width : 50.60 mm**

**Thickness : 9.50 mm**



**Marking Label**

**LABEL KN5.5**




**Group Marking Carrier**

**DCKNMLH**

**Height : 45.50 mm**

**Width : 43.50 mm**

**Thickness : 6 mm**



**SCKNMLH**

**Height : 45.50 mm**

**Width : 48 mm**

**Thickness : 8 mm**




**SCUNMLH**

**Height : 53.50 mm**

**Width : 50.60 mm**

**Thickness : 8 mm**



**Mounting Channel (Standard Lengths 300 mm, 500 mm, 1000 mm)**



