


## Arteor™ British standard socket outlets

Cat. No(s): 5 721 30 - 5 726 30 - 5 724 67




### 1. USE

2 P+E british standard socket outlets shuttered for child safety.  
 Mechanisms supplied with rocker plates, to be equipped with support frames and plates.  
 Flush mounting or surface mounting.

### 2. RANGE

	White	Magnesium	Red
2 P+E socket outlets switched With shutters - 3 modules	5 721 30	5 726 30	-
2 P+E socket outlet switched dedicated non standard pin. With shutters - 3 modules	-	-	5 724 67

### 3. DIMENSIONS (mm)

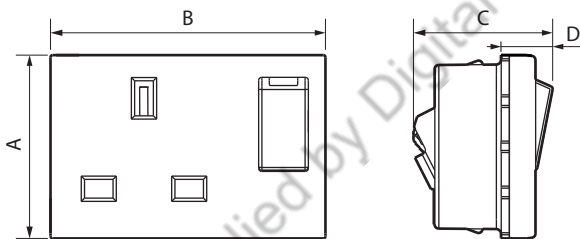

A	B	C	D
45	67.5	34	13

### 4. CONNECTION

Number of terminals: 3 terminals  
 Type of terminals: with screws  
 Terminal capacity: 3 x 4 mm<sup>2</sup>  
 Striping length: 9 mm  
 Screwdriver: cross-head max. 4 mm flat-blade

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Mechanical characteristics

Protection against impact: IK 04  
 Protection against solid bodies and liquids: IP 40 (mounted)  
 IP 20 (alone)

#### ■ 5.2 Material characteristics

Polyglass appearance  
 Base: Polycarbonate  
 Cover plates: Polycarbonate  
 Halogen free  
 UV resistant

#### Self-extinguishing:

+ 850° C / s for insulating parts holding live parts in place  
 + 650° C / 30 s for other parts made of insulating materials.

#### ■ 5.3 Electrical characteristics

Voltage: 250 V~  
 Current: 13 A  
 Frequency: 50/60 Hz

#### ■ 5.4 Climatic characteristics

Storage temperature: - 10° C to + 70° C  
 Use temperature: - 5° C to + 35° C

### 6. MAINTENANCE

Surface cleaning with a cloth.  
 Do not use: acetone, tar remover, trichloroethylene.

Maintenance with the following products: Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

**Caution:** A preliminary test should be carried out if other specific cleaning products are to be used.

### 7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.  
 Refer to e. catalogue.