


TECHNICAL DATA SHEET

1 kV, 4 C x 1.5 Cu (C12)/XLPE/PVC/SWA/PVC

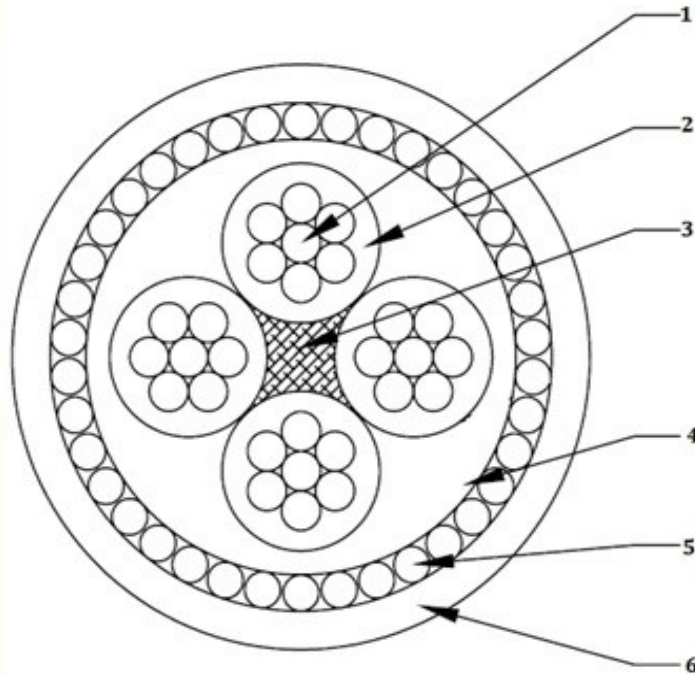

D.REF : 172

REF : STD TDS_0_ID 48

Product Standard

BS 5467

Performace Standard (Flame / Fire - Test)

IEC 60332 - 1

Rated voltage (Uo/U) (Um)

0.6/1 (1.2) kV

1 Circular Stranded Copper Class : 2 Conductor

Number of Core(s)	4	Nos
Nominal cross sectional area	1.5	mm ²
Approx. Diameter of Conductor	1.44	mm

2 Insulation - XLPE

Color (s)	Red, Yellow, Blue, Black,
Nominal Thickness	0.6 mm
Approx. Diameter over Insulation	2.7 mm

3 4 Core Laid up with PP Center Filler

Approx. Diameter over Laid Up	6.6	mm
-------------------------------	-----	----

4 Extruded Bedding - PVC

Nominal Thickness	0.8	mm
Approx. Diameter over bedding	8.7	mm

5 Armor - Type: Steel Wire

Nominal Diameter of wire	0.9	mm
Approx. Diameter over armour	10.4	mm

TECHNICAL DATA SHEET



1 kV, 4 C x 1.5 Cu (Cl2)/XLPE/PVC/SWA/PVC

6 Extruded Outer Sheath - PVC (Black)

Nominal Thickness	1.3	mm
Approx. Diameter over outer sheath	12.4	mm
7 Approx. Weight of complete cable	336	kg / km

8 Electrical Parameters

Max. DC Resistance of Conductor at 20°C	12.1	Ω/km
Approx. AC Resistance of Conductor at Maximum Operating Temperature	15.4287	Ω/km
Approx. Capacitance	0.33	μF / km
Approx. Inductance	0.33	mH / km
Approx. Inductive Reactance	0.1	Ω/km
Approx. Impedance	15.4	Ω/km
Approx. Voltage Drop	27	mV/Amp/mt

9 CURRENT CARRYING CAPACITY based on the conditions specified

Installation Type (Single Circuit)	3 core	
Soil Thermal Resistivity	1.2	°C.m/W
Ground temperature	15	°C
Ambient air temperature	30	°C
Burial depth	500	mm
Laid in ground	32	Amps
Laid in Duct	26	Amps
In air	25	Amps

10 Maximum conductor temperature for continuous operation / Short Circuit Operation

11 Short Circuit Current carrying capacity for 1 second, cable loaded as above prior to short circuit for		
Conductor	0.2145	kA/ 1 sec

12 Installation Parameters

Maximum pulling force (For Conductor)	36	kgf
Minimum Bending Radius	78	mm

**Drawing not to Scale*

**All dimensions and weight mentioned are approximate.*

Refer " **Ducab Drum Handling, Storing and Installation Guide " for more details on Drum Handling.*

**This TDS is Auto-Generated from Design Data Base, Hence no signature is required.*