DATASHEET - NHI11-PKZ0



Standard auxiliary contact, 1 N/O, 1 NC, Can be retrofitted on the right side of motor-protective circuit-breakers, Screw terminals

Powering Business Worldwide

Part no. NHI11-PKZ0
Catalog No. 072896
Alternate Catalog XTPAXSA11

No.

EL-Nummer 4355131

(Norway)

Delivery program

Product range		Accessories
Accessories		Standard auxiliary contact
		Can be retrofitted on the right side of motor-protective circuit-breakers
Contacts		Sill's
N/O = Normally open		1 N/O
N/C = Normally closed		1 NC
Contact diagram	÷	NHIII
Contact sequence	Jit Innova	1.03 1.31 1.04 1.22
Connection technique	K.	Screw terminals
For use with	<i>></i>	PKZ0(4) standard auxiliary contacts
For use with		PKZM01 PKZM0 PKZM4 PKZM0-T PKM0 PKE

Notes Can be fitted to the right of:
Motor protective circuit-breaker
Transformer-protective circuit-breaker
Motor protective circuit breaker for starter combinations
Cannot be used for motor starter combinations type MSC-R...
can be combined with AGM, NHI-E ...

Technical data Auxiliary contacts

U_{imp}	V AC	6000
		III/3
U _e	V	
U _e	V AC	500
U _e	V DC	250
	V AC	690
l _e	Α	
l _e	Α	3.5
l _e	Α	2
l _e	Α	1
	U _e U _e U _e I _e	U _e V U _e V AC U _e V DC V AC I _e A I _e A

DC-13 L/R - 100 ms			
24 V	I _e	Α	2
60 V	I _e	Α	1
110 V	I _e	Α	0.5
220 V	I _e	Α	0.25
Lifespan		S	
Lifespan, mechanical	Operations	x 10 ⁶	> 0.05
Lifespan, electrical	Operations	x 10 ⁶	0.05
Control circuit reliability	Failure rate	λ	$<10^{-8}$, $<$ one failure at 100 million operations (at U $_{e}=24$ V DC, $U_{min}=17$ V, $I_{min}=5.4$ mA)
interlocked opposing contacts			yes
Short-circuit rating without welding			
Fuseless		Туре	FAZ-B4/1-HI
Fuse		A gG/gL	10
Terminal capacities			4,
Solid or flexible conductor, with ferrule		mm^2	10 0,75 - 1,5 18 - 14 A600
Solid or stranded		AWG	18 - 14
Rating data for approved types			1
Pilot Duty			4V
AC operated			A600
DC operated			A600 Q300 600
General Use			, 20°.
AC		V	600
AC		Α	5
DC		V	250
DC		A	(O)

Design verification as per IEC/EN 61439

Design verification as per IEC/EN 61439		O	
Technical data for design verification	100		
Rated operational current for specified heat dissipation	l _n	Α	3.5
Heat dissipation per pole, current-dependent	P_{vid}	W	0.04
Equipment heat dissipation, current-dependent	P _{vid}	W	0
Static heat dissipation, non-current-dependent	P _{vs}	W	0
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	55
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.


10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 8.0

Low-voltage industrial components (EG000017) / Auxiliary contact block (EC000041)		
Electric engineering, automation, process control engineering / Low-voltage switch te (ecl@ss10.0.1-27-37-13-02 [AKN342013])	chnology / Compone	nt for low-voltage switching technology / Auxiliary switch block
Number of contacts as change-over contact		0
Number of contacts as normally open contact		1
Number of contacts as normally closed contact		
Number of fault-signal switches		0
Rated operation current le at AC-15, 230 V	А	3.5
Type of electric connection		Screw connection
Model		Top mounting
Mounting method		Side mounting
Lamp holder		None


Approvals

•••		44
Product Standards		UL 508; CSA-C22.2 No. 14; IEC60947-4-1; CE marking
UL File No.		E36332
UL Category Control No.	.0	NLRV
CSA File No.	2010	165628
CSA Class No.		3211-05
North America Certification	111.	UL listed, CSA certified
Specially designed for North America	1	No
North America Certification Specially designed for North America		

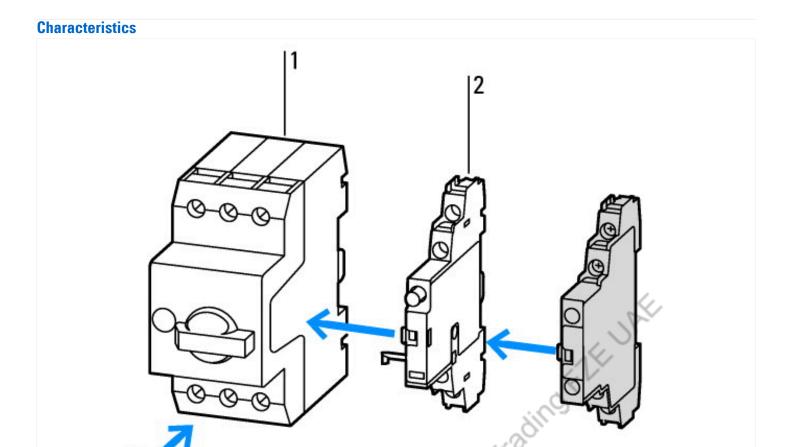



2: Trip-indicating auxiliary contact

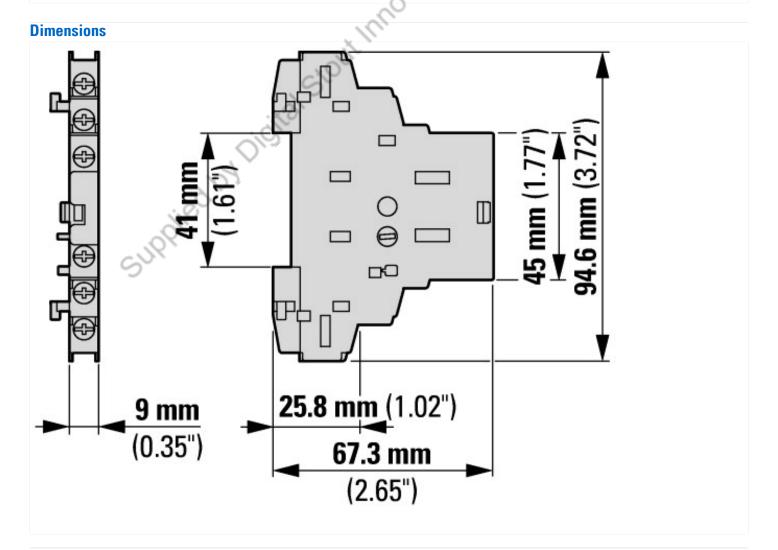

Additional product information (links)	
Motor starters and "Special Purpose Ratings" for the North American market	http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf
Busbar Component Adapters for modern Industrial control panels	http://www.moeller.net/binary/ver_techpapers/ver960en.pdf